




London
Stock Exchange

MIT303 · MIGRATION TO MILLENNIUM EXCHANGE

Level 2-ITCH Specification

Issue 9.4 · 22 March 2013

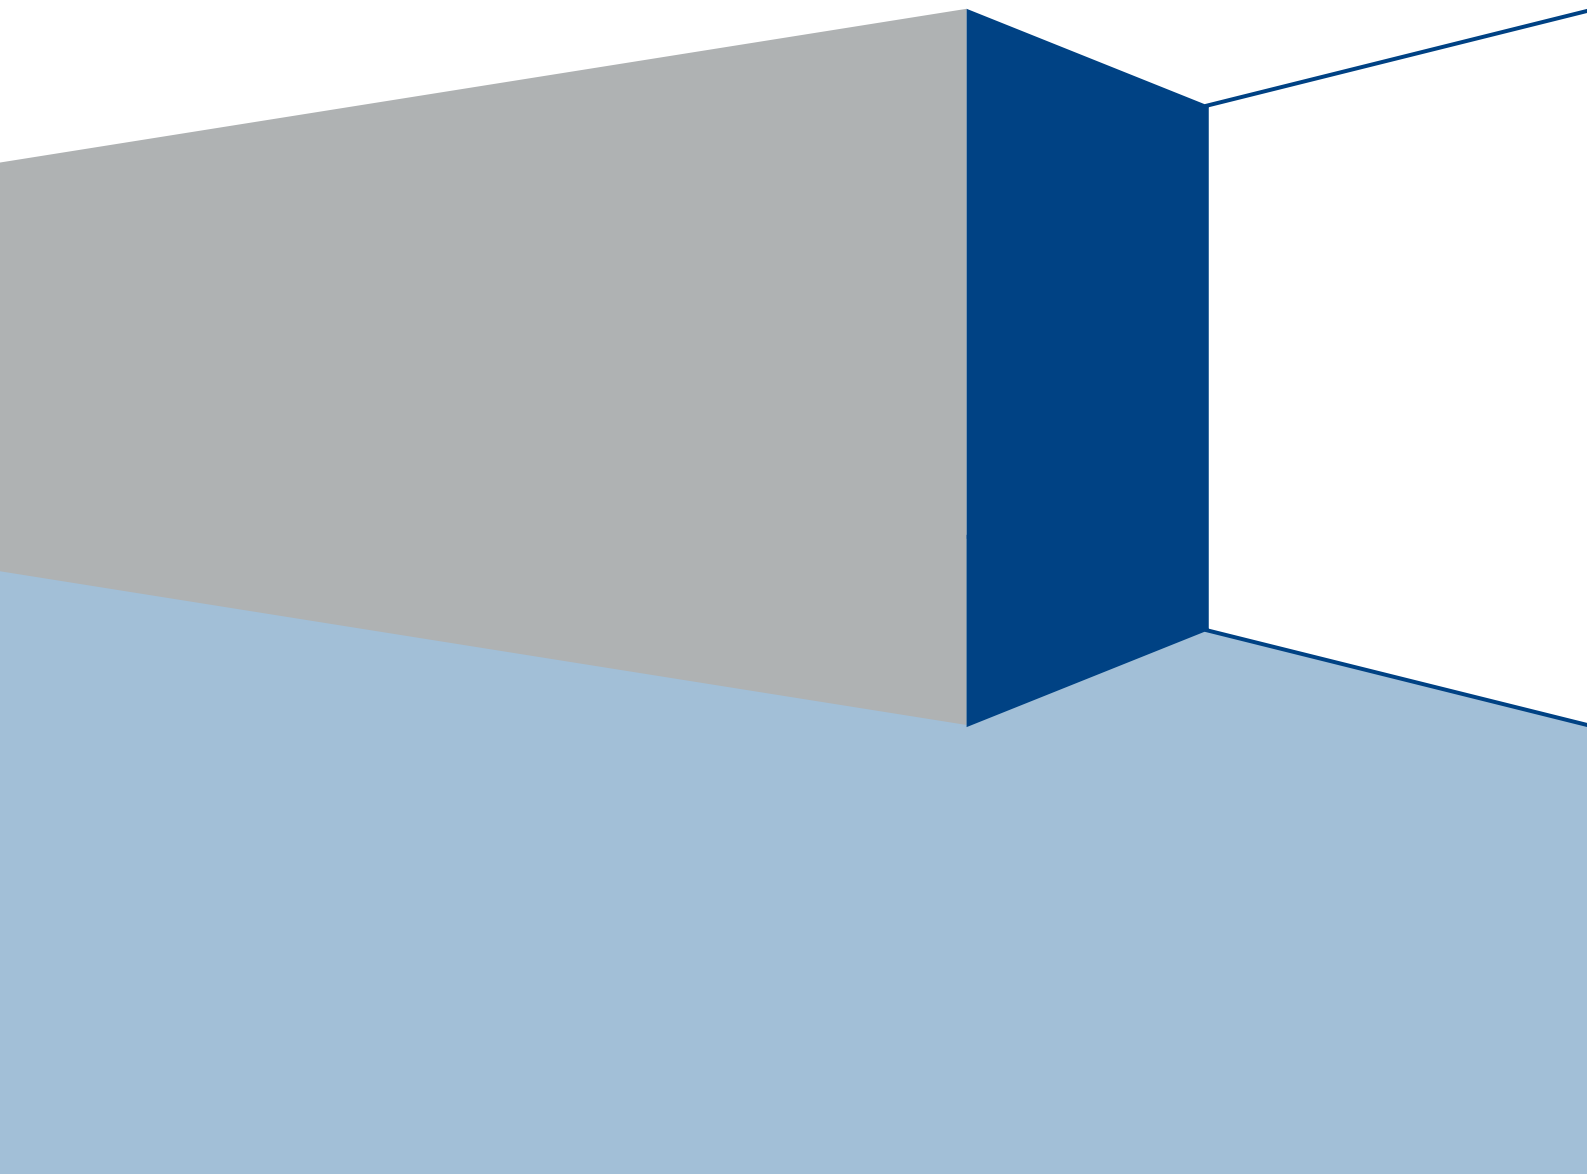

Contents

Level 2-ITCH Specification	1
Contents.....	2
Disclaimer	4
1. Introduction.....	5
1.1. Purpose	5
1.2. Readership.....	5
1.3. Document Series.....	5
1.4. Document History.....	6
1.5. Enquiries.....	7
2. Connectivity.....	8
2.1. Transmission Standards.....	8
2.1.1. Multicast Channels.....	8
2.1.2. Unicast Channels	8
2.2. ComplIDs.....	8
2.3. Failover and Recovery	8
2.4. Connectivity Policy	9
3. Recovery	10
3.1. Recipient Failures	10
3.1.1. Replay Channel	10
3.1.2. Recovery Channel.....	12
3.2. Failures at the Exchange.....	14
3.2.1. Snapshots on the multicast channel.....	14
3.2.2. Resetting Sequence Numbers.....	15
4. Message Formats.....	16
4.1. Packet Composition	16
4.2. Sequence Numbers	16
4.3. Timestamps	16
4.4. Data Types.....	17
4.5. Message Overview.....	18
4.5.1. Administrative Messages	18
4.5.2. Application Messages	18
4.6. Unit Header.....	20
4.7. Administrative Messages (Client – Initiated).....	21
4.7.1. Login Request.....	21
4.7.2. Replay Request	21
4.7.3. Snapshot Request.....	21
4.7.4. Logout Request.....	22
4.8. Administrative Messages (Server – Initiated)	22
4.8.1. Heartbeat.....	22
4.8.2. Login Response	22
4.8.3. Replay Response.....	23

4.8.4.	Snapshot Response.....	24
4.8.5.	Snapshot Complete.....	24
4.9.	Application Messages	25
4.9.1.	Time.....	25
4.9.2.	System Event.....	25
4.9.3.	Symbol Directory.....	26
4.9.4.	Symbol Status.....	27
4.9.5.	Add Order	29
4.9.6.	Add Attributed Order	30
4.9.7.	Order Deleted	31
4.9.8.	Order Modified	31
4.9.9.	Order Book Clear	32
4.9.10.	Order Executed	32
4.9.11.	Order Executed With Price/Size	33
4.9.12.	Trade.....	33
4.9.13.	Auction Trade	34
4.9.14.	Off-Book Trade.....	35
4.9.15.	Trade Break.....	36
4.9.16.	Auction Info	37
4.9.17.	Statistics.....	38
Appendix A – Trading halt reason codes		39
Appendix B – Off-book Trade Types		39

Disclaimer

The London Stock Exchange Group has taken reasonable efforts to ensure that the information contained in this publication is correct at the time of going to press, but shall not be liable for decisions made in reliance on it. The London Stock Exchange Group will endeavour to provide notice to customers of changes being made to this document, but this notice cannot be guaranteed. Therefore, please note that this publication may be updated at any time. The information contained is therefore for guidance only.

1. Introduction

Following the acquisition of MillenniumIT, the London Stock Exchange embarked on a programme of change that migrated the Group's equity markets from the legacy TradElect/Infolect platform to Millennium Exchange – the multi-asset class, ultra-low latency platform of MillenniumIT.

As part of the migration, the current range of market data services available on Infolect were overhauled to provide a suite of different service levels in recognition of the diverse needs of our client base. In addition to this, the services will also be based on recognised delivery standards to reduce the overall cost to our clients in developing and maintaining a direct connection to the Group's markets.

1.1. Purpose

The purpose of this document is to provide full details of the Level 2-ITCH service including message types and fields.

1.2. Readership

This document outlines the detailed message types and fields for the Level 2-ITCH feed as well as details on how to connect to the Replay and Recovery services available on Millennium Exchange.

When read in conjunction with the MIT301 - Guide to Market Data Services it is intended that these documents provide all of the details directly connected London Stock Exchange customers require to develop to the real time market data services.

This document is particularly relevant to technical staff within the Exchange's member firms, information vendors and other market participants interested in receiving London Stock Exchange market data.

1.3. Document Series

This document is part of series of documents providing a holistic view of full trading and information services available from the London Stock Exchange post the migration to Millennium Exchange.

The current series of documents are set out below:

- MIT201 - Guide to New Trading System
 - MIT202 – Trading Gateway (FIX 5.0) Specification

- MIT203 – Native Interface Message Specification
- MIT204 – Post Trade Gateway (FIX 5.0) Specification
- MIT205 – Drop Copy Gateway (FIX 5.0) Specification
- MIT301 - Guide to Market Data Services
 - MIT302 – FIX/FAST Message Specification
 - **MIT303 – Level 2-ITCH Message Specification (this document)**
 - MIT304 - Regulatory News Service Specification
- MIT401 - Reference Data Service Specification
- MIT501 – Guide to the Customer Testing Services
 - MIT502 – Guide to Application Certification
 - MIT503 – Certification Report
 - MIT304 - Regulatory News Service Specification
- MIT601 – Guide to Trading Services Disaster Recovery
- MIT701 – Guide to Sponsored Access
- MIT801 – Reject Codes

This series principally covers non-regulatory information. It does not override or supersede the Rules of the London Stock Exchange, the AIM Rules or Admission and Disclosure Standards and is intended to be read in conjunction with these Rules documents and the Millennium Exchange Parameters document.

1.4. Document History

This document has been through the following iterations:

Issue	Date	Description
1.0	1 February 2010	First issue of this document published via the Exchange's website and distributed to customers.
2.0	29 March 2010	Updated to include most recent message formats.
3.0	5 May 2010	Third issue of this document published via the London Stock Exchange's website and distributed to clients.
4.0	11 June 2010	Fourth issue of this document published via the London Stock Exchange's website and distributed to clients

5.0	19 July 2010	Fifth issue of this document published via the London Stock Exchange's website and distributed to clients
6.0	20 September 2010	Sixth issue of this document published via the London Stock Exchange's website and distributed to clients.
7.0	3 December 2010	Seventh issue of this document published via the London Stock Exchange's website and distributed to clients.
7.1	19 January 2011	Updated to include minor changes highlighted.
8.0	23 May 2011	Updated to include minor changes highlighted.
9.0	9 December 2011	Updated to support product enhancements being delivered as part of Functional Release Q1 2012
9.1	29 December 2011	Updated to include an additional new off-book trade type in Appendix B to support enhancements being delivered as part of Functional Release Q1 2012
9.2	14 March 2012	Minor corrections applied and a further flag added to an existing field in the Add Attributed Order Message.
9.3	1 November 2012	Added Connectivity Policy section 2.4
9.4	22 March 2013	Amended to reflect the latest Millennium enhancements.

In subsequent issues, where amendments have been made to the previous version, these changes will be identified using a series of side bars as illustrated opposite.

1.5. Enquiries

Please contact either Client Technology Services (UK) or your Technical Account Manager if you have any questions about the Millennium Exchange services outlined in this document. Client Technology Services (UK) can be contacted at:

- Telephone: +44 (0)20 7797 3939
- Email: londontam@londonstockexchange.com

2. Connectivity

2.1. Transmission Standards

2.1.1. Multicast Channels

The multicast channel utilises UDP over IP version 4 (IPv4) Ethernet standards. UDP header information is as defined in the IETF RFC 791 (IPv4) and RFC 768 (UDP) transmission standards. Each UDP packet will contain just one Unit Header.

2.1.2. Unicast Channels

The Recovery and Replay channels utilise TCP over IP version 4 (IPv4) Ethernet standards. TCP header information is as defined in the IETF RFC 793 standard and IPv4 is as defined in the RFC 791 standard.

2.2. ComplIDs

The ComplID of each client wishing to connect to the Recovery and Replay channels must be registered with London Stock Exchange before communications can begin. Each ComplID will be assigned a password on registration.

The same ComplID could be used to login to Recovery and Replay channels across market data groups. A client could also use the same ComplID to login to the Recovery and Replay Channels of both FAST and Level 2-ITCH feeds.

However, a ComplID may, at any particular time, only be logged into one TCP channel across all market data groups.

Passwords

Each new ComplID will be assigned the password **mit_1234** on registration. Unlike other market data services, clients will not be required to change their password on first logon.

2.3. Failover and Recovery

The system has been designed with fault tolerance and disaster recovery technology that ensures that trading should continue in the unlikely event of a process, gateway or site outage.

On unexpected disconnection from the primary gateway, a customer should ensure that their application behaves in accordance with the London Stock Exchange's connectivity policy.

2.4. Connectivity Policy

An application should attempt to connect a maximum of 3 times to the primary gateway with a minimum time out value of 3 seconds between attempts before attempting to connect to the secondary gateway – and this should be retried a maximum of a further 3 times. After 6 failed connection attempts (3 on each gateway) the clients should contact London Stock Exchange for further guidance.

Information on London Stock Exchange's Connectivity Policy can be found at the following link:

<http://www.londonstockexchange.com/products-and-services/technical-library/technical-guidance-notes/technical-guidance-notes.htm>

3. Recovery

3.1. Recipient Failures

Recipients have access to two identically sequenced multicast feeds: Feed A and Feed B. Recipients may process both feeds and arbitrate between them to minimise the probability of a data loss.

If a gap in sequence numbers is detected on the multicast channel, the recipient should assume that some or all of the order books maintained on its systems are incorrect and initiate one of the recovery processes outlined below.

3.1.1. Replay Channel

The TCP Replay channel should be used by recipients to recover from a small-scale data loss. It permits clients to request the retransmission of a limited number of messages already published on the multicast channel. The channel supports the retransmission of the last 65,000 messages published.

Each CompID may login to the Replay channel of a particular market data group up to a limited number times each day. The total number of [Replay Requests](#) that a client may send for a particular market data group is also limited. Recipients may request the Exchange to reset its login and request counts. This feature is intended to help manage an emergency situation and should not be relied upon as a normal practice.

If a client submits multiple requests on the Replay channel, they will be processed serially (i.e. one at a time). Clients are unable to cancel outstanding [Replay Requests](#).

Establishing a Connection

The client should use the relevant IP address and port to establish a TCP/IP session with the Replay channel. The client should initiate a session by sending the [Login Request](#) message. The client should identify itself by specifying its CompID in the Username field. The server will validate the CompID, password and IP address.

Once the client is authenticated, the server will respond with a [Login Response](#) message with the Status "A".

If a logon attempt fails because of an invalid CompID or IP address or if a message is sent prior to the login being established, the server will break the TCP/IP connection with the client without sending a [Login Response](#) message.

If a logon attempt fails because of an invalid password, a locked CompID or if logins are not currently permitted, the server will send a [Login Response](#) and then break the TCP/IP connection with the client.

If a client has exceeded the number permitted of log-ons for the current day, the server will reject any new logon attempt with a [Login Response](#) and then break the TCP/IP connection. The Status of such a [Login Response](#) message will be “b”.

If a [Login Request](#) is not received within 5 seconds of the establishment of a TCP/IP connection or a [Replay Request](#) is not received within 5 seconds of a successful logon, the server will break the TCP/IP connection with the client.

A logon attempt to the Replay channel made by an already logged in client will receive a Replay Response Message with Status = e (Failed (Other)).

Heartbeats

The server will not send heartbeats on the Replay channel during periods of inactivity.

Requesting Missed Messages

Once connected to the Replay channel, clients may use the [Replay Request](#) message to request the retransmission of missed messages. The request should include the sequence number of the first message in the range to be retransmitted along with the number of messages to be retransmitted.

The retransmission request will be serviced from the server’s cache of the last 65,000 messages published on the multicast channel. If the retransmission request includes one or more messages that are not in the server’s cache, the entire request will be rejected and no messages will be retransmitted.

Response to a Retransmission Request

The server will respond to the [Replay Request](#) with a [Replay Response](#) message to indicate whether the retransmission request is successful or not. A Status other than “A” will indicate that the request has been rejected.

In the case of a successful request, the server will retransmit the requested messages immediately after the [Replay Response](#). The sequence numbers of the retransmitted messages will be the same as when they were first disseminated on the multicast channel. The framing of the replayed messages inside of [Unit Headers](#) may differ between the original transmission and the retransmission.

Termination of the Connection

If the client does not send a [Logout Request](#) and terminate the connection within 5 seconds of the retransmission of the last missed message, the server will break the TCP/IP connection with the client.

3.1.2. Recovery Channel

The TCP Recovery channel should be used by recipients to recover from a large-scale data loss (i.e. late joiner or major outage). It permits clients to request a snapshot of the order book for the active instruments in the market data group.

Each CompID may login to the Recovery channel of a particular market data group a limited number of times each day. The total number of [Snapshot Request](#) messages that a client may submit for a particular market data group is also limited. Recipients may request the Exchange to reset its login and request counts. This feature is intended to help manage an emergency situation and should not be relied upon as a normal practice.

If a client submits multiple requests on the Recovery channel, they will be processed serially (i.e. one at a time). Active requests of multiple clients will be served on a round robin basis. Clients are unable to cancel outstanding [Snapshot Requests](#).

Establishing a Connection

The client should use the relevant IP address and port to establish a TCP/IP session with the Recovery channel. The client should initiate a connection by sending the [Login Request](#) message. The client should identify itself by specifying its CompID in the Username field. The server will validate the CompID, password and IP address of the client.

Once the client is authenticated, the server will respond with a [Login Response](#) message with the Status "A".

The client must wait for the server's Login Response before sending additional messages. Messages received from the client before the exchange of logons will be ignored.

If a logon attempt fails because of an invalid CompID or IP address or if a message is sent prior to the login being established, the server will break the TCP/IP connection with the client without sending a [Login Response](#) message.

If a logon attempt fails because of an invalid password, a locked CompID or if logins are not currently permitted, the server will send a [Login Response](#) and then break the TCP/IP connection with the client.

If a client has already exceeded the number of permitted log-ins for a particular day, the server will reject any new logon attempt with a [Login Response](#) and then break the TCP/IP connection. The Status of such a message will be "b".

If a [Login Request](#) is not received within 5 seconds of the establishment of a TCP/IP connection or a Snapshot Request is not received within 5 seconds of a successful logon, the server will break the TCP/IP connection with the client.

A logon attempt to the Recovery channel made by an already logged in client will receive a Replay Response Message with Status = e (Failed (Other)).

Heartbeats

The server will not send heartbeats on the Recovery channel during periods of inactivity.

Requesting Order Book Snapshots

Once connected to the Recovery channel, clients may use the [Snapshot Request](#) message to request a snapshot of the current order book for all instruments in a specified segment or for a particular instrument. If a client specifies both the Segment and the Instrument ID in the Snapshot Request message, it will be taken as a request for a stated segment.

Although instrument requests can include the sequence number from which the client can build its order books this will not be processed and the service will send a snapshot based on the most recent sequence number on the multicast feed.

A client may submit multiple [Snapshot Requests](#).

Response to a Snapshot Request for an Instrument

The server will transmit a Snapshot Response to indicate whether a Snapshot Request for an Instrument is accepted or rejected. A Status other than "A" will indicate that the request is rejected. The Sequence Number and Order Count fields of the Snapshot Response will always be zero if the response is rejected.

If the request is successful, the server will disseminate a snapshot of the current book for both the order and quote books (if any) for the requested instrument via a series of Add Order and Add Attributed Order messages. Order book snapshots for the requested instrument(s) will be transmitted serially (i.e. one book at a time). Each such message will represent a single active order and will not include a sequence number. If a particular price point contains multiple orders, they will be disseminated in terms of their time priority (i.e. the oldest order first).

The server will transmit a Symbol Status message once the details for all active orders for the instrument's order book are disseminated. This message will indicate the current trading status of the requested instrument. This will be followed by the Snapshot Complete message. If an instrument has both order book and quote books, the server will transmit two separate Snapshot Complete messages once the details of all active orders for the particular order book are disseminated. The Snapshot Complete message indicates whether the entry was made on the order or quote book via the Flags field. The message will include the sequence number with which the

order book snapshot was synchronised and the instrument to which it relates. The client may begin processing the buffered messages for the instrument from the multicast channel once the order book snapshot is processed.

Response to a Snapshot Request for a Segment

The server will transmit a Snapshot Response to indicate whether a Snapshot Request for a segment is accepted or rejected. A Status other than "A" will indicate that the request is rejected. The Sequence Number and Order Count fields of the Snapshot Response will be zero whether the request is accepted or rejected.

If the request is successful, the server will disseminate a snapshot of the current book for both the order and quote books (if any) for all instruments in the requested segment via series of Add Order and Add Attributed Order messages. Each such message will represent a single active order and will not include a sequence number. If a particular price point contains multiple orders, they will be disseminated in terms of their time priority (i.e. the oldest order first).

Order book snapshots for the requested instruments will be transmitted serially (i.e. one instrument at a time). The server will transmit a Symbol Status message for each instrument, followed by a Snapshot Complete message once the details of all active orders for a particular instrument's order book are disseminated. The Snapshot Complete message indicates whether the entry was made on the order or quote book via the Flags field. This message will include the sequence number with which the order book snapshot for the instrument was synchronised. While such a Snapshot Complete will include the instrument to which it relates, it will not include a value in the Segment field. The client may begin processing the buffered messages for the instrument from the multicast channel once its order book snapshot is processed.

The server will also transmit a Snapshot Complete message once the details of all active orders for all instruments in the requested segment are disseminated. The Sequence Number field of the message will be zero. While the final Snapshot Complete will include an indication of the segment to which it relates, it will not include a value in the Symbol field.

3.2. Failures at the Exchange

3.2.1. Snapshots on the multicast channel

In the unlikely event of an outage at the Exchange, recipients may be required to refresh their order book and statistics displays for one or more instruments.

In such a scenario the server will, on the Real-Time channel, broadcast an Order Book Clear message for each affected instrument. In such an event recipients must discard the contents of their order book and statistics displays for these instruments.

The server will then transmit a series of Add Order, Add Attributed Order and Statistics messages, on the Real-Time channel, to disseminate the current order book and statistics for each affected instrument.

3.2.2. Resetting Sequence Numbers

If the market data feed is, in the unlikely event of an outage, failed over to the backup site or is restarted, the message sequence number of the multicast channel will be reset to 1.

4. Message Formats

This section provides details on the data types, unit header, nine administrative messages and fifteen application messages utilised by the server. For each message, a description of each field is provided along with the applicable data type, offset and length (in bytes).

4.1. Packet Composition

The [Unit Header](#) is used to deliver all administrative and application messages to and from the server on all three channels. A [Unit Header](#) may contain zero, one or more payload messages. While a [Unit Header](#) may contain multiple application messages, it will never contain more than one administrative message. A [Unit Header](#) will not contain both administrative and application messages.

4.2. Sequence Numbers

All application messages transmitted by the server on the multicast and Replay channels are sequenced. The [Unit Header](#) only contains the sequence number of the first message. Each subsequent message in the [Unit Header](#) will have an implied sequence number one greater than the previous message. The sequence number of first message of the next [Unit Header](#) can be determined by adding the value in the Message Count field of the [Unit Header](#) to the value in its Sequence Number field.

The application messages sent by the server on the Recovery channel as well as all administrative messages transmitted by both the server and the client are unsequenced. The [Unit Header](#) used to transport all such messages, other than a [Heartbeat](#), will include a Sequence Number of zero.

4.3. Timestamps

The server will, on the multicast channel, transmit a [Time](#) message for every second for which at least one application message is generated. The time specified in this message serves as a reference for the times specified in all other application messages. The timestamps in all other messages are specified as a nanosecond offset from the most recent [Time](#) message – accurate to the millisecond. This message is not transmitted during periods where no application messages are generated for the multicast channel.

The retransmission of messages on the Replay channel will include the [Time](#) messages originally broadcast on the multicast channel (i.e. with the same timestamp).

While [Time](#) messages will be included when an order book snapshot is provided on the Recovery channel, the times in these messages will be different from those published when the active orders were originally disseminated on the multicast

channel. Clients are unable to determine the time at which an active order was submitted from the messages transmitted on the Recovery channel.

4.4. Data Types

The fields of the various messages utilised by the server will support the data types outlined below.

Data Type	Length	Description
Alpha	Variable	These fields use standard ASCII character bytes. They are left justified and padded on the right with spaces.
Bit Field	1	A single byte used to hold up to eight 1-bit flags. Each bit will represent a Boolean flag. The 0 bit is the lowest significant bit and the 7 bit is the highest significant bit.
Byte	1	A single byte used to hold one ASCII character.
Date	8	Date specified in the YYYYMMDD format using ASCII characters.
Time	8	Time specified in the HH:MM:SS format using ASCII characters.
Price	8	Signed Little-Endian encoded eight byte integer field with eight implied decimal places.
UInt8	1	8 bit unsigned integer.
UInt16	2	Little-Endian encoded 16 bit unsigned integer.
UInt32	4	Little-Endian encoded 32 bit unsigned integer.
UInt64	8	Little-Endian encoded 64 bit unsigned integer.

All Reserved Fields with Alpha Data Type will be populated with Spaces (Hex 0x20). All other Reserved Fields will be populated with Hex 0x00

4.5. Message Overview

4.5.1. Administrative Messages

Name	Message Type		Usage
	ASCII	Hex	
Heartbeat	-	-	Used by the server, on the multicast channel, to exercise the communication line during periods of inactivity.
Login Request	(soh)	0x01	Used by the client to login to the Replay or Recovery channel.
Login Response	(stx)	0x02	Used by the server to accept or reject a login request to the Replay or Recovery channel.
Logout Request	(enq)	0x05	Used by the client to logout of the Replay or Recovery channel.
Replay Request	(etx)	0x03	Used by the client to request a retransmission of messages on the Replay channel.
Replay Response	(eot)	0x04	Used by the server to respond to a retransmission request on the Replay channel.
Snapshot Request	•	0x81	Used by the client to request for a snapshot of the current order book on the Recovery channel.
Snapshot Response	,	0x82	Used by the server to respond to a snapshot request on the Recovery channel.
Snapshot Complete	<i>f</i>	0x83	Used by the server to indicate that the transmission of an order book snapshot is complete.

4.5.2. Application Messages

Applications messages may only be sent by the server.

Name	Message Type		Usage
	ASCII	Hex	
Time	T	0x54	Sent by the server for every second for which at least one application message is generated. This message is not transmitted during periods where no other application messages are generated.
System Event	S	0x53	Sent to indicate the start and end of the day.

Name	Message Type	Usage	
Symbol Directory	R	0x52	Used to disseminate information (e.g. symbol, segment, ISIN, underlying, etc.) on each instrument.
Symbol Status	H	0x48	Indicates the trading session (e.g. pre-opening, regular trading, etc.) that currently applies to an instrument.
Add Order	A	0x41	Sent to indicate that an anonymous limit or market order is added to the order book.
Add Attributed Order	F	0x46	Indicates that a named order is added to the order book. The identity of the submitting firm is included in the message.
Order Deleted	D	0x44	Sent to indicate that the remainder of a displayed order is cancelled.
Order Modified	U	0x55	Indicates that the displayed quantity or price of a displayed order has been updated. The message will include an indication whether the order has retained or lost its time priority.
Order Book Clear	y	0x79	Sent to instruct recipients to remove all orders from the order book for the specified instrument.
Order Executed	E	0x45	Indicates that the displayed portion of an order is fully or partially filled at its displayed price. The executed quantity is included in the message.
Order Executed With Price/Size	C	0x43	Sent if a displayed order is fully or partially filled at a price that is different from its displayed price. The executed quantity and price is included in the message along with an indication of whether the trade should update time and sales and statistics displays.
Trade	P	0x50	Sent if a non-display order is fully or partially filled.
Auction Trade	Q	0x51	Sent to report details of an auction (e.g. opening, closing, etc.). The message indicates the price and bulk volume associated with the auction.
Off-Book Trade	x	0x78	Sent to report the details of a privately negotiated trade.
Trade Break	B	0x42	Indicates that a previously reported traded is cancelled.
Auction Info	I	0x49	Used to disseminate the indicative auction price and the tradable quantity and imbalance at this price.

Name	Message Type		Usage
Statistics	w	0x77	Used to disseminate official Opening and Closing prices

4.6. Unit Header

Field	Offset	Length	Type	Description
Length	0	2	UInt16	Length of the message block including the header and all payload messages.
Message Count	2	1	UInt8	Number of payload messages that will follow the header.
Market Data Group	3	1	Byte	Identity of the market data group the payload messages relate to. This field is not validated for client initiated messages.
Sequence Number	4	4	UInt32	Sequence number of the first payload message.
Payload	8	Variable	-	One or more payload messages.

4.7. Administrative Messages (Client - Initiated)

4.7.1. Login Request

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x01</td> <td>Login Request</td> </tr> </tbody> </table>	Hex	Meaning	0x01	Login Request
Hex	Meaning							
0x01	Login Request							
Username	2	6	Alpha	CompID assigned to the client.				
Password	8	10	Alpha	Password assigned to the CompID.				

4.7.2. Replay Request

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x03</td> <td>Replay Request</td> </tr> </tbody> </table>	Hex	Meaning	0x03	Replay Request
Hex	Meaning							
0x03	Replay Request							
Market Data Group	2	1	Byte	Identity of the market data group the replay request relates to.				
First Message	3	4	UInt32	Sequence number of the first message in range to be retransmitted.				
Count	7	2	UInt16	Number of messages to be resent				

4.7.3. Snapshot Request

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x81</td> <td>Snapshot Request</td> </tr> </tbody> </table>	Hex	Meaning	0x81	Snapshot Request
Hex	Meaning							
0x81	Snapshot Request							
Sequence Number	2	4	UInt32	Sequence number from which client can build the order book, only required for instrument level requests.				

Segment	6	6	Alpha	Segment the request relates to. The field should contain only spaces if the Instrument ID field is populated
Instrument ID	12	4	UInt32	LSE Instrument Identifier. The instrument the request relates to. The field should contain only zeros if it does not relate to an instrument.

4.7.4. Logout Request

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x05</td> <td>Logout Request</td> </tr> </tbody> </table>	Hex	Meaning	0x05	Logout Request
Hex	Meaning							
0x05	Logout Request							

4.8. Administrative Messages (Server - Initiated)

4.8.1. Heartbeat

A [Unit Header](#) with a Message Count of zero will be used by the server as a Heartbeat message. Such a message will never increment the sequence number of the multicast channel. However, the next expected sequence number will be included in the Sequence Number to enable recipients to detect gaps on the multicast channel.

4.8.2. Login Response

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x02</td> <td>Login Response</td> </tr> </tbody> </table>	Hex	Meaning	0x02	Login Response
Hex	Meaning							
0x02	Login Response							

Status	2	1	Byte	Status of the login request.
				Value Meaning
				A Login Accepted
				a CompID Inactive/Locked
				b Login Limit Reached
				c Service Unavailable
				d Concurrent Limit Reached
e Failed (Other)				

4.8.3. Replay Response

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <tr> <th>Hex</th> <th>Meaning</th> </tr> <tr> <td>0x04</td> <td>Replay Response</td> </tr> </table>	Hex	Meaning	0x04	Replay Response
Hex	Meaning							
0x04	Replay Response							
Market Data Group	2	1	Byte	Identity of the market data group the replay request relates to.				
First Message	3	4	UInt32	Sequence number of the first message in range to be retransmitted. This will be zero if Status is not "A".				
Count	7	2	UInt16	Number of messages to be resent. This will be zero if Status is not "A".				
Status	9	1	Byte	Status of the replay request.				
				Value Meaning				
				A Request Accepted				
				D Request Limit Reached				
				I Invalid Market Data Group				
				O Out of Range				
				U Replay Unavailable				
				d Unsupported message type				
e Failed (other)								
c Concurrent limit reached								

4.8.4. Snapshot Response

Field	Offset	Length	Type	Description																		
Length	0	1	UInt8	Length of message including this field.																		
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x82</td> <td>Snapshot Response</td> </tr> </tbody> </table>	Hex	Meaning	0x82	Snapshot Response														
Hex	Meaning																					
0x82	Snapshot Response																					
Sequence Number	2	4	UInt32	This field will always be populated with 0.																		
Order Count	6	4	UInt32	This field will always be populated with 0.																		
Status	10	1	Byte	Status of the snapshot request. <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Request Accepted</td> </tr> <tr> <td>O</td> <td>Out of Range</td> </tr> <tr> <td>U</td> <td>Snapshot Unavailable</td> </tr> <tr> <td>a</td> <td>Valid Segment or Symbol Not Specified</td> </tr> <tr> <td>b</td> <td>Request Limit Reached</td> </tr> <tr> <td>c</td> <td>Concurrent Limit Reached</td> </tr> <tr> <td>d</td> <td>Unsupported message type</td> </tr> <tr> <td>e</td> <td>Failed (Other)</td> </tr> </tbody> </table>	Value	Meaning	A	Request Accepted	O	Out of Range	U	Snapshot Unavailable	a	Valid Segment or Symbol Not Specified	b	Request Limit Reached	c	Concurrent Limit Reached	d	Unsupported message type	e	Failed (Other)
Value	Meaning																					
A	Request Accepted																					
O	Out of Range																					
U	Snapshot Unavailable																					
a	Valid Segment or Symbol Not Specified																					
b	Request Limit Reached																					
c	Concurrent Limit Reached																					
d	Unsupported message type																					
e	Failed (Other)																					

4.8.5. Snapshot Complete

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x83</td> <td>Snapshot Complete</td> </tr> </tbody> </table>	Hex	Meaning	0x83	Snapshot Complete
Hex	Meaning							
0x83	Snapshot Complete							
Sequence Number	2	4	UInt32	Sequence number with which the snapshot is synchronised.				
Segment	6	6	Alpha	Segment the snapshot relates to. The field will contain only spaces if it does not relate to a segment.				

Instrument ID	12	4	UInt32	Instrument the snapshot relates to. The field will be blank if the snapshot does not relate to an instrument.
Flags	16	1	Bit Field	Bit Name Meaning
				5 Firm Quote 0: No 1: Yes

4.9. Application Messages

4.9.1. Time

Field	Offset	Length	Type	Description
Length	0	1	UInt8	Length of message including this field.
Message Type	1	1	Byte	Hex Meaning 0x54 Time
Seconds	2	4	UInt32	Number of seconds since midnight. Midnight will be in terms of the local time for the server (i.e. not UTC).

4.9.2. System Event

Field	Offset	Length	Type	Description
Length	0	1	UInt8	Length of message including this field.
Message Type	1	1	Byte	Hex Meaning 0x53 System Event
Nanosecond	2	4	UInt32	Nanoseconds since last Time message.
Event Code	6	1	Byte	Value Meaning
				C End of Day
				O Start of Day

4.9.3. Symbol Directory

Field	Offset	Length	Type	Description								
Length	0	1	UInt8	Length of message including this field.								
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x52</td> <td>Symbol Directory</td> </tr> </tbody> </table>	Hex	Meaning	0x52	Symbol Directory				
Hex	Meaning											
0x52	Symbol Directory											
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.								
Instrument ID	6	4	UInt32	Instrument's symbol.								
Reserved	10	1	Byte	Reserved field								
Reserved	11	1	Byte	Reserved field								
Symbol Status	12	1	Alpha	<table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>S</td> <td>Suspended</td> </tr> <tr> <td>a</td> <td>Inactive</td> </tr> <tr> <td>H</td> <td>Halt</td> </tr> </tbody> </table> <p>This field will contain a space if the instrument is active.</p>	Value	Meaning	S	Suspended	a	Inactive	H	Halt
Value	Meaning											
S	Suspended											
a	Inactive											
H	Halt											
ISIN	13	12	Alpha	Instrument identification number								
SEDOL	25	12	Alpha	Instrument identification number								
Segment	37	6	Alpha	Segment the instrument is assigned to.								
Underlying	43	6	Alpha	Reserved for future use								
Currency	49	3	Alpha	ISO Currency Code								
Reserved	52	1	Byte	Reserved field								
Reserved	53	4	Alpha	Reserved field								
Previous Close Price	57	8	Price	Previous Close Price of instrument								

4.9.4. Symbol Status

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x48</td> <td>Symbol Status</td> </tr> </tbody> </table>	Hex	Meaning	0x48	Symbol Status
Hex	Meaning							
0x48	Symbol Status							
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.				
Instrument ID	6	4	UInt32	Instrument's symbol.				
Reserved	10	1	Byte	Reserved field				
Reserved	11	1	Byte	Reserved field				

Trading Status	12	1	Byte	Value Meaning	
				H	Halt
				T	Regular Trading/Start of Trade Reporting
				0	Suspended
				a	Opening Auction Call
				b	Post-Close
				c	Market Close / System Shutdown
				d	Closing Auction Call
				e	AESP Auction Call
				f	Resume Auction Call
				l	Pause
				m	Pre-Mandatory
				n	Mandatory
				o	Post-Mandatory
				q	EDSP Auction Call
r	Periodic Auction Call				
t	End Trade Reporting				
w	No Active Session				
x	End of Post Close				
v	Closing Price Publication				
u	Closing Price Crossing				
Flags	13	1	Bit Field	Bit Name Meaning	
				5 Firm Quote 0: No 1: Yes	
Halt Reason	14	4	Alpha	Reason for the trading halt. This field will contain only spaces if Trading Status is not "H", or if the reason is unknown.	

Session Change Reason	18	1	UInt8	Value	Meaning
				0	Scheduled Transition
				1	Extended by Market Ops
				2	Shortened by Market Ops
				3	Market Order Imbalance
				4	Price Outside Range
9	Unavailable (recovery service only)				
New End Time	19	8	Time	New time the session will end. The field will contain only spaces if Session Change Reason is "0" or "9". New End Time will be in terms of the local market time (i.e. not UTC).	
Book type	27	1	UInt8	Value	Meaning
				1	On-Book
				2	Off-Book

4.9.5. Add Order

Field	Offset	Length	Type	Description	
Length	0	1	UInt8	Length of message including this field.	
Message Type	1	1	Byte	Hex	Meaning
				0x41	Add Order
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.	
Order ID	6	8	UInt64	Unique identifier of the order.	
Side	14	1	Byte	Value	Meaning
				B	Buy Order
				S	Sell Order
Quantity	15	4	UInt32	Displayed quantity of the order.	
Instrument ID	19	4	UInt32	Instrument identifier	
Reserved	23	1	Byte	Reserved field	
Reserved	24	1	Byte	Reserved field	

Price	25	8	Price	Limit price of the order.
Flags	33	1	Bit Field	Bit Name Meaning
				4 Market Order

4.9.6. Add Attributed Order

Field	Offset	Length	Type	Description	
Length	0	1	UInt8	Length of message including this field.	
Message Type	1	1	Byte	Hex Meaning 0x46 Add Attributed Order	
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.	
Order ID	6	8	UInt64	Unique identifier of the order.	
Side	14	1	Byte	Value Meaning	
				B Buy Order S Sell Order	
Quantity	15	4	UInt32	Displayed quantity of the order.	
Instrument ID	19	4	UInt32	Instrument identifier	
Reserved	23	1	Byte	Reserved field	
Reserved	24	1	Byte	Reserved field	
Price	25	8	Price	Limit price of the order.	
Attribution	33	11	Alpha	Identity of firm that submitted the order.	
Flags	44	1	Bit Field	Bit Name Meaning	
				4 Named Market Order	0: No 1: Yes
				5 Firm Quote	0: No 1: Yes

4.9.7. Order Deleted

Field	Offset	Length	Type	Description						
Length	0	1	UInt8	Length of message including this field.						
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x44</td> <td>Order Deleted</td> </tr> </tbody> </table>	Hex	Meaning	0x44	Order Deleted		
Hex	Meaning									
0x44	Order Deleted									
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.						
Order ID	6	8	UInt64	Identifier for the order.						
Flags	14	1	Bit Field	<table border="1"> <thead> <tr> <th>Bit</th> <th>Name</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>Firm Quote</td> <td>0: No 1: Yes</td> </tr> </tbody> </table>	Bit	Name	Meaning	5	Firm Quote	0: No 1: Yes
Bit	Name	Meaning								
5	Firm Quote	0: No 1: Yes								
InstrumentID	15	4	UInt32	Instrument Identifier						

4.9.8. Order Modified

Field	Offset	Length	Type	Description									
Length	0	1	UInt8	Length of message including this field.									
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x55</td> <td>Order Modified</td> </tr> </tbody> </table>	Hex	Meaning	0x55	Order Modified					
Hex	Meaning												
0x55	Order Modified												
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.									
Order ID	6	8	UInt64	Identifier for the order.									
New Quantity	14	4	UInt32	New displayed quantity of the order.									
New Price	18	8	Price	New limit price of the order.									
Flags	26	1	Bit Field	<table border="1"> <thead> <tr> <th>Bit</th> <th>Name</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Priority Flag</td> <td>0: Priority Lost 1: Priority Retained</td> </tr> <tr> <td>5</td> <td>Firm Quote</td> <td>0: No 1: Yes</td> </tr> </tbody> </table>	Bit	Name	Meaning	0	Priority Flag	0: Priority Lost 1: Priority Retained	5	Firm Quote	0: No 1: Yes
Bit	Name	Meaning											
0	Priority Flag	0: Priority Lost 1: Priority Retained											
5	Firm Quote	0: No 1: Yes											

4.9.9. Order Book Clear

Field	Offset	Length	Type	Description						
Length	0	1	UInt8	Length of message including this field.						
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x79</td> <td>Order Book Clear</td> </tr> </tbody> </table>	Hex	Meaning	0x79	Order Book Clear		
Hex	Meaning									
0x79	Order Book Clear									
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, to the nearest microsecond.						
Instrument ID	6	4	UInt32	Instrument identifier						
Reserved	10	1	Byte	Reserved field						
Reserved	11	1	Byte	Reserved field						
Flags	12	1	Bit Field	<table border="1"> <thead> <tr> <th>Bit</th> <th>Name</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>Firm Quote</td> <td>0: No 1: Yes</td> </tr> </tbody> </table>	Bit	Name	Meaning	5	Firm Quote	0: No 1: Yes
Bit	Name	Meaning								
5	Firm Quote	0: No 1: Yes								

4.9.10. Order Executed

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x45</td> <td>Order Executed</td> </tr> </tbody> </table>	Hex	Meaning	0x45	Order Executed
Hex	Meaning							
0x45	Order Executed							
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.				
Order ID	6	8	UInt64	Identifier for the order.				
Executed Quantity	14	4	UInt32	Quantity executed.				
Trade Match ID	18	8	UInt64	Unique identifier of the trade.				

4.9.11. Order Executed With Price/Size

Field	Offset	Length	Type	Description						
Length	0	1	UInt8	Length of message including this field.						
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x43</td> <td>Order Executed With Price/Size</td> </tr> </tbody> </table>	Hex	Meaning	0x43	Order Executed With Price/Size		
Hex	Meaning									
0x43	Order Executed With Price/Size									
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.						
Order ID	6	8	UInt64	Identifier for the order.						
Executed Quantity	14	4	UInt32	Quantity executed.						
Display Quantity	18	4	UInt32	Displayed quantity of the order after the execution.						
Trade Match ID	22	8	UInt64	Unique identifier of the trade.						
Printable	30	1	Byte	<table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>N</td> <td>Non-Printable</td> </tr> <tr> <td>Y</td> <td>Printable</td> </tr> </tbody> </table>	Value	Meaning	N	Non-Printable	Y	Printable
Value	Meaning									
N	Non-Printable									
Y	Printable									
Price	31	8	Price	Price at which the order was executed.						

4.9.12. Trade

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x50</td> <td>Trade</td> </tr> </tbody> </table>	Hex	Meaning	0x50	Trade
Hex	Meaning							
0x50	Trade							
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond..				
Executed Quantity	6	4	UInt32	Quantity executed.				
Instrument ID	10	4	UInt32	Instrument identifier				
Reserved	14	1	Byte	Reserved field				

Reserved	15	1	Byte	Reserved field
Price	16	8	Price	Executed price.
Trade Match ID	24	8	UInt64	Unique identifier of the trade.
Reserved	32	1	Byte	Reserved field

4.9.13. Auction Trade

Field	Offset	Length	Type	Description														
Length	0	1	UInt8	Length of message including this field.														
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x51</td> <td>Auction Trade</td> </tr> </tbody> </table>	Hex	Meaning	0x51	Auction Trade										
Hex	Meaning																	
0x51	Auction Trade																	
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.														
Quantity	6	4	UInt32	Quantity executed in auction.														
Instrument ID	10	4	UInt32	Instrument's symbol.														
Reserved	14	1	Byte	Reserved field														
Reserved	15	1	Byte	Reserved field														
Price	16	8	Price	Price of auction.														
Trade Match ID	24	8	UInt64	Unique identifier of the trade.														
Auction Type	32	1	Byte	<table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>C</td> <td>Closing Auction</td> </tr> <tr> <td>O</td> <td>Opening Auction</td> </tr> <tr> <td>A</td> <td>AESP</td> </tr> <tr> <td>B</td> <td>EDSP</td> </tr> <tr> <td>E</td> <td>Resume Auction</td> </tr> <tr> <td>F</td> <td>Periodic Auction</td> </tr> </tbody> </table>	Value	Meaning	C	Closing Auction	O	Opening Auction	A	AESP	B	EDSP	E	Resume Auction	F	Periodic Auction
Value	Meaning																	
C	Closing Auction																	
O	Opening Auction																	
A	AESP																	
B	EDSP																	
E	Resume Auction																	
F	Periodic Auction																	

4.9.14. Off-Book Trade

Field	Offset	Length	Type	Description				
Length	0	1	UInt8	Length of message including this field.				
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x78</td> <td>Off-Book Trade</td> </tr> </tbody> </table>	Hex	Meaning	0x78	Off-Book Trade
Hex	Meaning							
0x78	Off-Book Trade							
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.				
Executed Quantity	6	4	UInt32	Quantity executed.				
Instrument ID	10	4	UInt32	Instrument identifier				
Reserved	14	1	Byte	Reserved field				
Reserved	15	1	Byte	Reserved field				
Price	16	8	Price	Executed price.				
Trade Match ID	24	8	UInt64	Unique identifier of the trade.				
Trade Type	32	4	Alpha	Type of off-book trade. See Appendix B.				
Trade Time	36	8	Time	Time off-book trade was executed. Time will be specified in UTC.				
Trade Date	44	8	Date	Date off-book trade was executed.				
Traded Currency	52	4	Alpha	<p>Currency in which an off book trade has occurred other than for the trading currency of the relevant instrument.</p> <p>The possible values will be the ISO 4217 codes for currency. However the following values will also be disseminated.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>GBX</td> <td>GB Pennies</td> </tr> </tbody> </table>	Value	Meaning	GBX	GB Pennies
Value	Meaning							
GBX	GB Pennies							
Original Price	56	8	Price	Price in the execution currency. The field should contain only zeroes if the trade did not take place in a currency other than for the trading currency of the instrument.				

Execution Venue	64	5	Alpha	<p>The possible values will be the ISO 10383 codes for Exchange ID. However the following values too will be disseminated.</p> <p>Value</p> <hr/> <p>EXPA</p> <hr/> <p>SI</p> <hr/> <p>XOFF</p>									
Flags	69	1	Bit Field	<table border="1"> <thead> <tr> <th>Bit</th> <th>Name</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Late Trade</td> <td>0: No 1: Yes</td> </tr> <tr> <td>5</td> <td>Bargain Condition Indicator</td> <td>0: No 1: Yes</td> </tr> </tbody> </table>	Bit	Name	Meaning	0	Late Trade	0: No 1: Yes	5	Bargain Condition Indicator	0: No 1: Yes
Bit	Name	Meaning											
0	Late Trade	0: No 1: Yes											
5	Bargain Condition Indicator	0: No 1: Yes											

4.9.15. Trade Break

Field	Offset	Length	Type	Description						
Length	0	1	UInt8	Length of message including this field.						
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x42</td> <td>Trade Break</td> </tr> </tbody> </table>	Hex	Meaning	0x42	Trade Break		
Hex	Meaning									
0x42	Trade Break									
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.						
Trade Match ID	6	8	UInt64	Identifier of the cancelled trade.						
Trade Type	14	1	Byte	<table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>T</td> <td>On-Book Trade</td> </tr> <tr> <td>N</td> <td>Off-Book Trade</td> </tr> </tbody> </table>	Value	Meaning	T	On-Book Trade	N	Off-Book Trade
Value	Meaning									
T	On-Book Trade									
N	Off-Book Trade									
InstrumentID	15	4	UInt32	Instrument Identifier						

4.9.16. Auction Info

Field	Offset	Length	Type	Description														
Length	0	1	UInt8	Length of message including this field.														
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x49</td> <td>Indicative Auction Info</td> </tr> </tbody> </table>	Hex	Meaning	0x49	Indicative Auction Info										
Hex	Meaning																	
0x49	Indicative Auction Info																	
Nanosecond	2	4	UInt32	Nanoseconds since last Time message, accurate to the nearest microsecond.														
Paired Quantity	6	4	UInt32	Quantity that will be matched at the indicative price.														
Reserved	10	4	UInt32	Reserved field														
Reserved	14	1	Byte	Reserved field														
Instrument ID	15	4	UInt32	Instrument identifier														
Reserved	19	1	Byte	Reserved field														
Reserved	20	1	Byte	Reserved field														
Price	21	8	Price	Indicative auction price.														
Auction Type	29	1	Byte	<table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>C</td> <td>Closing Auction</td> </tr> <tr> <td>O</td> <td>Opening Auction</td> </tr> <tr> <td>A</td> <td>AESP</td> </tr> <tr> <td>B</td> <td>EDSP</td> </tr> <tr> <td>E</td> <td>Resume auction</td> </tr> <tr> <td>F</td> <td>Periodic auction</td> </tr> </tbody> </table>	Value	Meaning	C	Closing Auction	O	Opening Auction	A	AESP	B	EDSP	E	Resume auction	F	Periodic auction
Value	Meaning																	
C	Closing Auction																	
O	Opening Auction																	
A	AESP																	
B	EDSP																	
E	Resume auction																	
F	Periodic auction																	

4.9.17. Statistics

Field	Offset	Length	Type	Description																
Length	0	1	UInt8	Length of message including this field.																
Message Type	1	1	Byte	<table border="1"> <thead> <tr> <th>Hex</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0x77</td> <td>Statistics</td> </tr> </tbody> </table>	Hex	Meaning	0x77	Statistics												
Hex	Meaning																			
0x77	Statistics																			
Nanosecond	2	4	UInt32	Nanoseconds since last Time message.																
Instrument ID	6	4	UInt32	LSE Instrument Identifier.																
Reserved	10	1	Byte	Reserved field																
Reserved	11	1	Byte	Reserved field																
Statistic Type	12	1	Alpha	<table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>O</td> <td>Opening Price</td> </tr> <tr> <td>C</td> <td>Closing Price</td> </tr> </tbody> </table>	Value	Meaning	O	Opening Price	C	Closing Price										
Value	Meaning																			
O	Opening Price																			
C	Closing Price																			
Price	13	8	Price	Opening or Closing price.																
Open/Close Price Indicator	21	1	Alpha	<table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>UT</td> </tr> <tr> <td>B</td> <td>AT</td> </tr> <tr> <td>C</td> <td>Mid of BBO</td> </tr> <tr> <td>D</td> <td>Last AT</td> </tr> <tr> <td>E</td> <td>Last UT</td> </tr> <tr> <td>F</td> <td>Manual</td> </tr> <tr> <td>I</td> <td>Derived from previous close</td> </tr> </tbody> </table>	Value	Meaning	A	UT	B	AT	C	Mid of BBO	D	Last AT	E	Last UT	F	Manual	I	Derived from previous close
Value	Meaning																			
A	UT																			
B	AT																			
C	Mid of BBO																			
D	Last AT																			
E	Last UT																			
F	Manual																			
I	Derived from previous close																			
Reserved	22	1	Bit Field	Reserved for future use																

Appendix A – Trading halt reason codes

Code	Reason
9998	Matching partition suspended
9999	System suspended
space	Reason not available

Appendix B – Off-book Trade Types

Trade Type Value	Description
17	LC – Late correction
24	PC – Previous Day Contra
1000	O – Ordinary trade
1004	IF – Inter Fund Transfer with delayed publication requested
1005	NK – Negotiated trade with delayed publication requested
1006	NT – Negotiated trade with immediate publication
1007	OC – Cancellation of OTC trade more than three days old
1008	OK - Ordinary Trade with delayed publication requested
1009	OT – OTC Trade with immediate publication
1010	SC - SI Late Correction
1011	SI - SI Trade
1012	SK - SI Trade with delayed publication requested
1013	TK - OTC Trade with delayed publication requested
1018	BF – Inter Fund Cross with delayed publication requested (MTF 1 TBA)
1019	BC – Cancellation of OTC Trade after date of publication (MTF 1 TBA)
1020	QT – OTC Trade (MTF 2 TBA)
1021	QK – OTC Trade with delayed publication requested (MTF 2 TBA)
1022	QF – Inter Fund Cross with delayed publication requested (MTF 2 TBA)

1023	QC – Cancellation of OTC Trade after date of publication (MTF 2 TBA)
1024	MT – OTC Trade (MTF 3 TBA)
1025	MK – OTC Trade with delayed publication requested (MTF 3 TBA)
1026	MF – Inter Fund Cross with delayed publication requested (MTF 3 TBA)
1027	MC – Cancellation of OTC Trade after date of publication (MTF 3 TBA)
1028	CT – OTC Trade (MTF 4 TBA)
1029	CK – OTC Trade with delayed publication requested (MTF4 TBA)
1031	CC – Cancellation of OTC Trade after date of publication (MTF 4 TBA)
1032	GC – Delayed Publication Late Correction
2001	BT – OTC Trade (MTF 1 TBA)
2002	CF – Inter Fund Cross with delayed publication requested (MTF 4 TBA)
3001	BK – OTC Trade with delayed publication requested (MTF 1 TBA)



London
Stock Exchange

Copyright © March 2013 London Stock Exchange Group plc.
Registered in England and Wales No. 2075721.

London Stock Exchange plc has used all reasonable efforts to ensure that the information contained in this publication is correct at the time of going to press, but shall not be liable for decisions made in reliance on it.

London Stock Exchange and the coat of arms device are registered trade marks of London Stock Exchange plc.

London Stock Exchange
10 Paternoster Square
London EC4M 7LS
Telephone: +44 (0)20 7797 1000

www.londonstockexchange.com